

LIPPMANN

Specifications

200c

Track-Mounted Cone Crusher



DESCRIPTION

Heavy duty track mounted crusher with following features:

- MC200 cone
- 360Hp Volvo D11 T4 Final / 361Hp Volvo D11 Stage V / 350Hp CAT C9 Tier 3 / 375Hp CAT C9 Stage V
- Tracked
- Integrated hopper with folding rear door
- I-beam plate fabricated chassis construction
- Large gap between crusher discharge and main conveyor feedboot
- Open chassis design for ease of maintenance
- Fast setup time

DIMENSIONS AND WEIGHTS

Length - transport all models	16.4m (53' - 8.6")
Width - transport all models	2.8m (9' - 1.4")
Height - transport truck	3.4m (11' - 1.8")
Weight - track	40,470 Kgs (89,221 lbs.)

CAPACITIES


Diesel tank capacity	595L (157 US gal)
Hydraulic tank capacity	650L (172 US gal)

FEEDER

Feeder opening width	800mm (36")
Feeder drum crs.	6000mm (19' 8.2")
Drive	Hydraulic
Feeder belt width	1050mm (48")
Motor	Danfoss OMSS 125
Gearbox	Bonfig 809 W2 24.2:1
Flow rate	87.4 Lpm (23.1 US gpm)
Adjustable speed	Yes
Maximum speed	29 rpm

CRUSHING CHAMBER

Feed opening	914mm (38")
Crusher input speed	750 - 950 rpm
Crusher drive	Direct drive
Min. opening	See chart below
Max. opening	See chart below
Cone weight	10,400kg (22,928 lbs.)
Closed side setting adjustment	Hydraulic
Level sensor	Ultrasonic
Throw	77mm at discharge with new liners
Power required	200 Hp

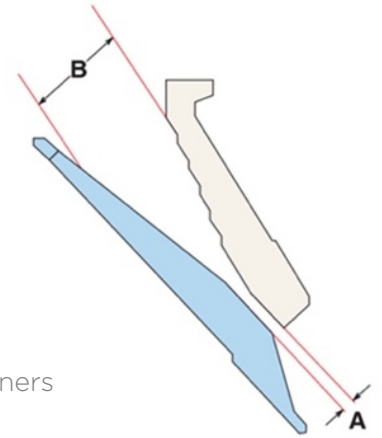

CRUSHER CAVITY SELECTION

		STANDARD	
CRUSHER SIZE	CAVITY	MINIMUM SETTING "A" 1	FEED OPENING "B" 2
MC200	Fine	13mm (0.5")	95mm (3.74")
	Medium	17mm (0.67")	125mm (4.92")
	Coarse	19mm (0.75")	185mm (7.28")
MC300	Fine	13mm (0.5")	107mm (4.21")
	Medium	17mm (0.67")	150mm (5.91")
	Coarse	19mm (0.75")	211mm (8.31")
MC400	Fine	20mm (0.79")	198mm (7.8")
	Medium	25mm (0.98")	252mm (9.92")
	Coarse	30mm (1.18")	299mm (11.77")

HOPPER

Length	3780mm (12' - 4.9")
Width	2200mm (7' - 2")
Volume	5m ³ (6.5yd ³) leveled off, 6.2m ³ (8.1 yd ³) heaped
Material	6mm sides + 10mm Hardox liners

MAIN CONVEYOR (SHORT)

Stockpile height	3554mm (11' - 7.9")
Belt width	1200mm (48")
Belt spec	Plain 500/3 8+2
Drive drum dia.	350mm (13.7")
Tail drum dia.	270mm (10.6")
Motor	OMV800
Flow rate	89.6 Lpm (23.7 US gpm)
Maximum speed	112 rpm
Angle adjustable	Yes
Quick release	Yes

POWERUNIT AND HYDRAULICS

Engine	Volvo D11 T4 final engine
Engine power	268 Kw (360HP)
Engine speed	1570 - 1900 rpm
Cone drive clutch	PT tech HPTO14TF1
Flywheel pump 1 (tracks / feeder)	Kawasaki K3VL80
Flywheel pump 2 (tracks / main conveyor)	Kawasaki K3VL80
LH PTO pump 3 (auxiliary / lube / pilot)	29/29/10
Total system flow (max)	335 Lpm (88.5 US gpm)
Hydraulic tank capacity	60 L (211 US gals)

ELECTRICS

Emergency stops	4 off, 2 feeder, 2 powerunit
Chassis cabling	Armored cable
Start siren	Yes - 10 sec delay
Control panel	Tedd Engineering / IFM
Engine shutdowns	Low oil pressure High water temp Air filter blockage (selectable) Fuel contamination Low hydraulic tank level Low lube oil flow Low lube oil pressure High lube oil temperature High hydraulic oil temperature
Radio control tracks and feeder	Standard
Pendant track control	Yes - plugged in control cabinet

TRACKS


Width	400mm (15.7")
Length	3800mm (12' - 5.5") crs
Height	717mm (32")
Gearbox	Bonfiglioli 711
Ratio	144:1
Motor	Rexroth A2FE90
Speed max	1.50 Kph (0.93 mph)
Flow rate	152 Lpm (40.2 US gpm)
Multiple speeds	Three speed system selectable at control panel with smooth start / stop

OPTIONS

- Hopper extensions
- Water pump and dust suppression system
- Various cone liner options
- Work lights
- Belt scale
- Refueling pump - standard

SAFETY FEATURES

- External belt alignment points
- External grease points
- Engine safety shutdown systems
- Full safety guarding for nip points

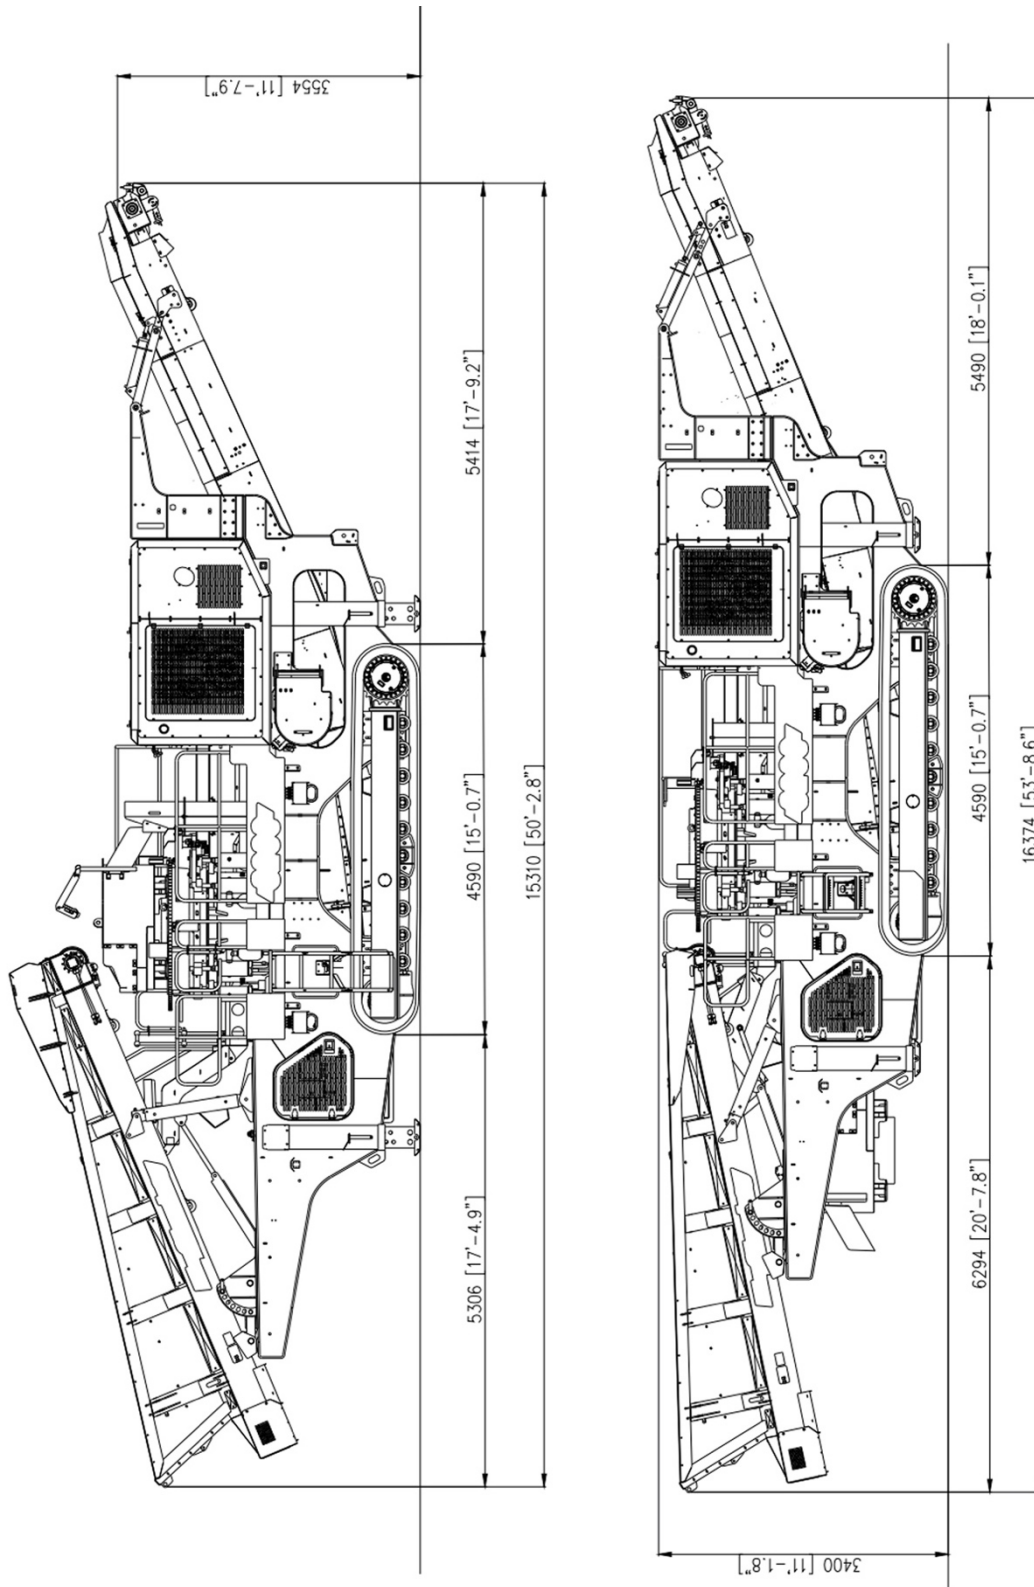

LIPPMANN

Metso McCloskey USA, LLC
 dba: Lippmann
 3271 East Van Norman Avenue
 Cuday, WI 53110-0586 USA
www.lippmann-milwaukee.com

Lippmann European Office
 47 Moor Road
 Coalisland, Co. Tyrone BT714QB Northern Ireland
 (+44) 28-8774-0926
www.lippmannglobal.com

All specifications are current as of this pricing, but are subject to change.