

LIPPMANN

Specifications

4244i

Track-Mounted Impact Crusher



DESCRIPTION

Heavy duty track mounted crusher with following features:

- 1050mm (41.3") diameter x 1125mm (44.3") wide impactor
- 360 Hp Volvo D11 T4 Final engine or 350 Hp CAT C9 Tier 3 engine
- Integrated hydraulic folding hopper
- Integrated hydraulic folding stockpiling conveyors
- I-beam plate fabricated chassis construction
- Open chassis design for ease of maintenance
- Fast setup time
- Vibrating feeder under crusher discharge

DIMENSIONS AND WEIGHTS

Length - transport	15.668m (51' - 4.9")
Width - transport	2.78m (9' - 1.5")
Height - transport	3.40m (11' - 1.8")
Weight (estimated)	42,000 Kgs (92,594 lbs.) inc. magnet & dirt conveyor

CAPACITIES

Diesel tank capacity	595 L (157 US gal)
Hydraulic tank capacity	650 L (172 US gal)

IMPACTOR CHAMBER

Feed opening WxH	1149mm x 708mm (45.2" x 27.9")
Impactor rotor	1050mm (41.3") diameter x 1125mm (44.3") wide
Crusher speed	606-740 rpm (33.3-40.7 m/sec rotor tip speed)
Number of aprons	2
Number of blowbars	4
Full blowbar weight	231 Kg (509 lbs)
Crusher drive	Direct drive
Feed size	600mm x 500mm x 500mm lump (24" x 20" x 20")
Impactor weight	10,300 Kg (22,700 lbs)
Rotor weight	3,309 Kg (7,295 lbs)
Closed side setting adjustment	Hydraulic rams, shim system
Speed sensor	Yes
Load sensor	Engine load monitoring

PAN FEEDER

Feeder width	1064mm (41.8")
Feeder length	2460mm (96.9")
Drive	Hydraulic
Motor	David Brown MCC 2208 59cc/rev
Flow rate	Up to 59.2 Lpm (15.6 US gpm)
Adjustable speed	Yes - via mechanical flow control
Variable speed	Yes - via electrical proportional pump
Maximum speed	970 rpm

DOUBLE DECK GRIZZLY PRESCREEN

Prescreen width (inside wearplates)	1064mm (41.9")
Prescreen length overall	2015mm (6' - 7.3")
Grizzly section opening	Tapered 40-70mm (1.6" - 2.8")
Grizzly section length	2113mm (83.2")
Bottom deck mesh	1494mm x 1060mm (58.8" x 41.7")
Drive	Hydraulic
Motor	David Brown MCC 2208 58.7cc/rev
Flow rate	85.5 Lpm (22.6 US gpm)
Adjustable speed	No
Auto stop start system	Yes
Maximum speed	1050 rpm

HOPPER

Length overall	4280mm (14' - 0.5")
Width	2180mm (7' - 1.8")
Volume	6.0m ³ (7.8yd ³)
Material	8mm sides + 10mm Hardox liners
Locking system	Hydraulic rear wedges and side hydraulic legs

SIDE CONVEYOR

Stockpile height	2488mm (8' - 2")
Belt width	650mm (26")
Belt spec	EP 400/3 3+1.5
Drive drum dia.	220mm (8.6")
Tail drum dia.	220mm (8.6") - spoked
Motor	OMT400
Flow rate	Up to 55.4 Lpm (14.6 US gpm)
Adjustable speed	Yes
Maximum speed	Up to 138 rpm

MAIN CONVEYOR

Stockpile height	4142mm (13' - 7.1")
Belt width	1200mm (48")
Belt spec	Plain 500/3 8+2
Drive drum dia.	330mm (13")
Tail drum dia.	287mm (11.3") - spoked
Motor	OMV800
Flow rate	Up to 84 Lpm (22.2 US gpm)
Maximum speed	Up to 105 rpm
Angle adjustable	Yes
Quick release	Yes

PAN FEEDER UNDER IMPACTOR (OPTION)

Width (across base plate)	1264mm (49.8")
Length	2370mm (93.3")
Base liners	10mm (3/8") stainless steel
Side liners	12mm (1/2") Hardox 400
Operating angle	8°
Vibrating motor	Twin out of balance mass
Hydraulic motor	2 off Eaton 32.9cc/rev
Fixed speed	Yes
Flow rate	85.5 Lpm (22.6 US gpm)

POWERUNIT AND HYDRAULICS

Engine	Volvo D11 Tier 4 Final / CAT C9 Tier 3
Engine power	268 kW (360 HP) / 261 kW (350 HP)
Engine speed	1600 - 1880 rpm
Impactor drive clutch	PT Tech HPTO14TF1
Flywheel pump 1 (tracks / feeder)	Kawasaki K3VL80
Flywheel pump 2 (tracks / main conveyor)	Kawasaki K3VL80
LH PTO pump 3 (prescreen / side conv)	Turolla 29/23/07
Front PTO pump 4 (underpan / pilot)	Turolla 36/07
Total system flow (max)	353.5 Lpm (93.4 US gpm)
Hydraulic tank capacity	650 L (172 US gals)
Hydraulic tank ratio	1.83 : 1
Hydraulic oil cooler	Yes

ELECTRICS

Emergency stops	4 off, 2 feeder, 2 powerunit
Chassis cabling	Armored cable
Start siren	Yes - 10 sec delay
Control panel	Tedd Engineering / IFM
Engine shutdowns	Low oil pressure High water temp Air filter blockage (selectable) Fuel contamination Low hydraulic tank level High hydraulic return line filter back pressure High hydraulic water filter back pressure High hydraulic oil temperature
Radio control tracks and feeder	Standard
Pendant track control	Yes - plugged in control cabinet

TRACKS


Width	400mm (15.7")
Length	3800mm (12' - 5.5") crs
Height	817mm (32")
Gearbox	Bonfiglioli 711 (or equivalent)
Ratio	144:1
Motor	Rexroth A2FE90
Speed max	1.50 Kph (0.93 mph)
Flow rate	152 Lpm (40.2 US gpm)
Multiple speeds	Three speed system selectable at control panel with smooth start / stop
Attachment to chassis	Bolt-on for quick change

OPTIONS

- Main conveyor variable speed control
- Hopper extensions
- Overband magnet
- Water pump and dust suppression system
- Various blow bar material options
- Work lights
- Belt scale
- Refueling pump - standard

SAFETY FEATURES

- External belt alignment points
- External grease points
- Engine safety shutdown systems
- Full safety guarding for nip points

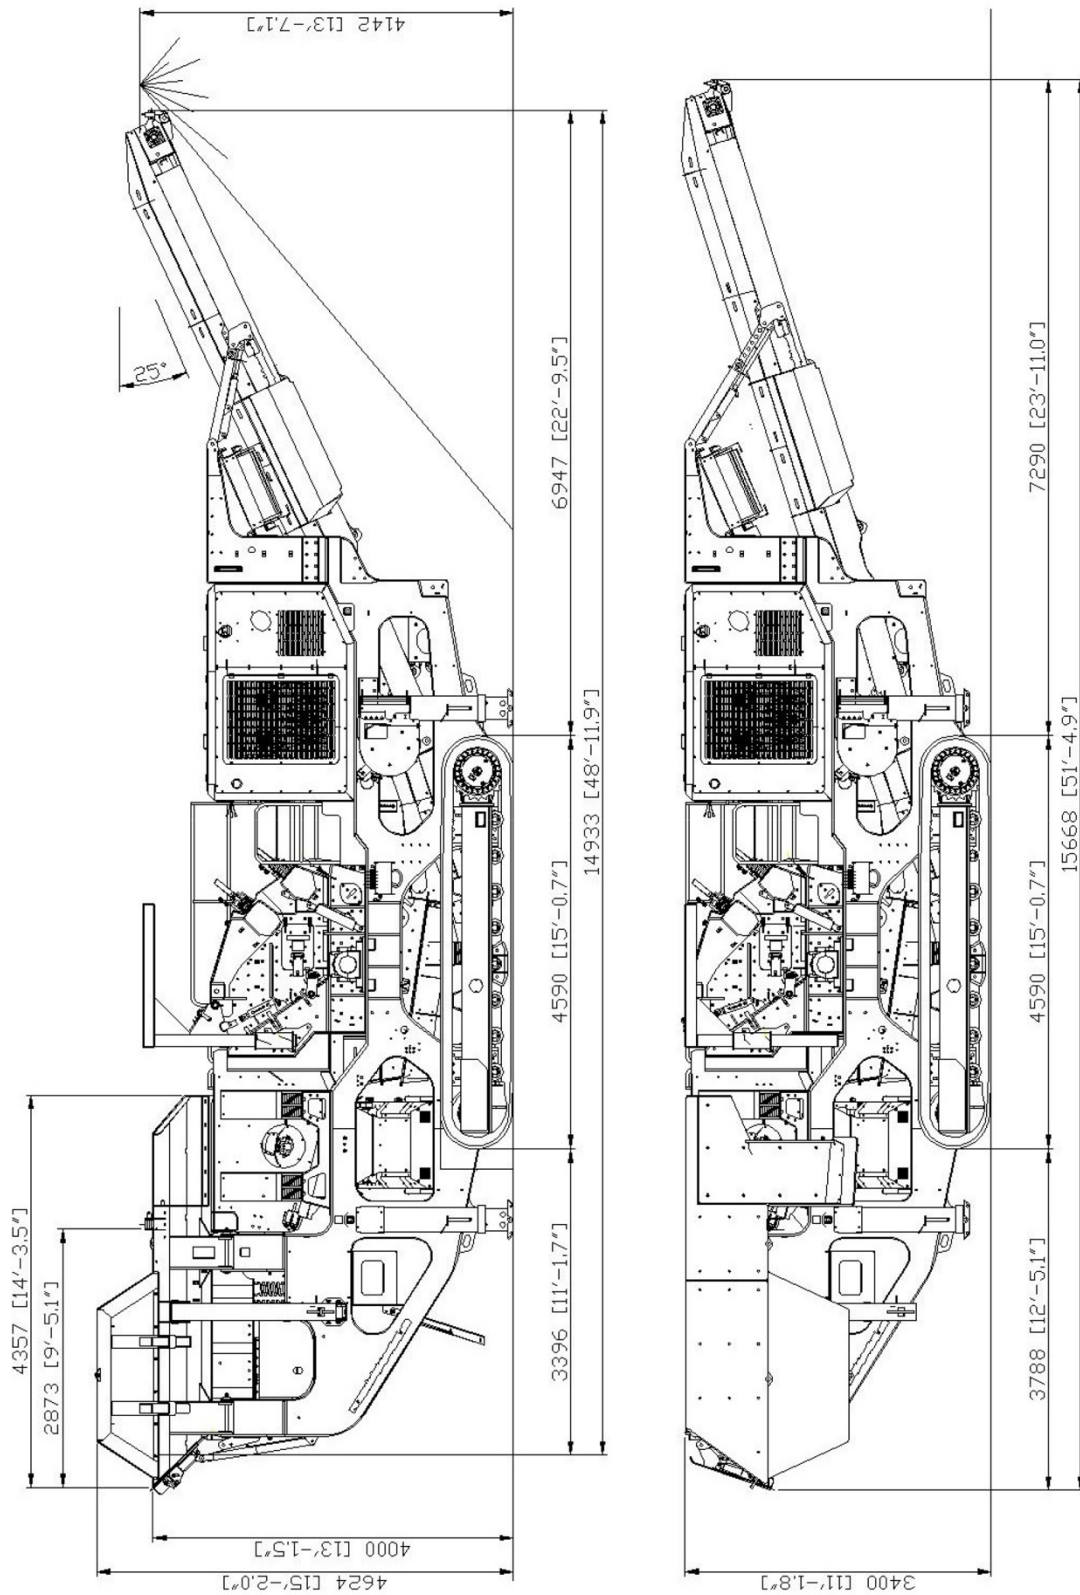

LIPPMANN

Metso McCloskey USA, LLC
 dba: Lippmann
 3271 East Van Norman Avenue
 Cudahy, WI 53110-0586 USA
www.lippmann-milwaukee.com

Lippmann European Office
 47 Moor Road
 Coalisland, Co. Tyrone BT714QB Northern Ireland
 (+44) 28-8774-0926
www.lippmannglobal.com

All specifications are current as of this pricing, but are subject to change.